

Adderlink X-DVI DVI Video, USB Tastatur/Maus EDID DDC KVM Extender über 1x CATx bis 50 Meter



DESCRIPTION:

The AdderLink X-DVI is the first extender to transmit both full DVI video as well as USB keyboard and mouse over a single CAT 6 cable

The AdderLink X-DVI allows users to distribute control of any computer which uses DVI video and USB for keyboard and mouse interface. The X-DVI can deliver perfect digital video at distances up to 50 meters and resolutions up to 165 MPixels per second (e.g. 1920x1200 @ 60Hz or 3840 x 2400 @ 17Hz). In operation, the X-DVI is truly plug and play, delivering full EDID data from screen to computer ensuring your hardware is always setup to deliver optimal display performance.

FEATURES:

Full single link DVI extender

The AdderLink X-DVI extender is designed to deliver full single link DVI digital video resolutions up to 165 MPixels per second. 165MPixels per second is the maximum data rate available on single link DVI connections, and is achieved without the need to compress data in any way. Resolutions supported by single link DVI range from 640 x 480 @ 60 Hz (25 MPixels/s) through to 3840 x 2400 @ 17Hz (164 MPixels/s).

USB keyboard and mouse extender

Alongside fully un-compressed DVI video, the AdderLink X-DVI also delivers bidirectional USB HID data allowing you to extend keyboards and mice over 50 meters on the same CATx cable. This makes the X-DVI perfect for distributed workstations where you want to reduce environmental concerns such as heat and noise. A typical example of this would be post production suites. By centralising your workstations, you can also extend operational life-span by ensuring optimal temperature control, and minimal physical disturbance.

Single CATx distribution

AdderLink X-DVI requires just one CATx (CAT6 recommended) cable. Other solutions available require two cables to carry DVI and DDC EDID. The X-DVI delivers this alongside USB data over a single CATx cable. Dependent upon cable type and quality, distances in excess of those quoted by Adder may also be achieved.

DVI-D digital video

The AdderLink X-DVI is specifically designed to carry Digital video over 50 meters. By maintaining the video in a purely digital domain, no loss of quality through D/A or A/D conversion will be experienced, ensuring the display output (LCD panel for example) is exactly the same as the signal produced by the display adapter (video card).

Extended profile DDC EDID

The AdderLink X-DVI carries extended profile DDC EDID data from your display device to the display adapter to ensure that your system is configured to deliver optimal video performance. The extended profile DDC EDID is particularly important when extending video to high performance display devices. This is essential for professional graphics users such as post production, broadcast, architecture, graphic design, medical imaging, CAD or any other applications where display performance is critical.

Intelligent cable modelling

The X-DVI has been designed to be used in many different environments across many different types and makes of cable. To ensure the quality of your DVI signal is always optimal, Adder have modeled a broad range of cables and integrated these models into the X-DVI. As a result, the user has greater flexibility over the CATx connection, allowing you to make use of existing CATx infrastructure.

Interface/mains power options

The AdderLink X-DVI transmitter can be powered directly via the USB link, reducing cable clutter. If you prefer, a mains power adapter is also available.

SPECIFICATION:

Video Resolution:

Single link DVI video resolution up to a maximum pixel rate of 165MP/s

Extension Distance:

Maximum of 50m using CATx S/FTP cable

O/S Compatibility:

Operating system independent

Connectors (local / remote):

Local end: DVI-D, USB B, optional power jack, RJ45

Remote end: DVI-D, dual USB A, power jack,

Physical:

Local: All metal case, 120mm / 4.7" (w) x 75mm / 3"(d) x 26mm / 1" (h) 319g / 0.7 lb.

Remote: All metal case, 120mm / 4.7" (w) x 75mm / 3"(d) x 26mm / 1" (h) 323g / 0.7 lb.

Power :

Local interface powered, optional +5V DC; remote end +5V

Operating temperature:


0-40Deg C

Approvals:

CE, FCC

Order Codes:

X-DVI-EURO (inc European power supply for receiver)

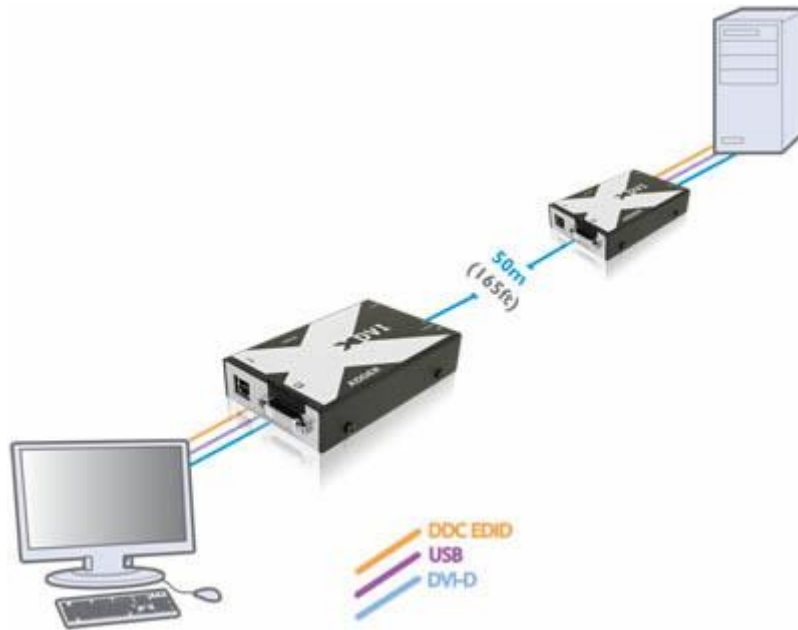

Kontakt Daten - Anfrage:

Tel: 02822 33 33 990

E-Mail: info@bellequip.at

Internet: www.bellequip.at

Lösungen für

IT, EDV, Rechenzentren, Industrie, Automation, Telekommunikation, Leitstand, Rundfunk, Fernsehen, Werbung		Physikalischer Schutz – Datenschutz IT- Sicherheitsräume
19 Zoll Einbaukonsolen 2 Port KVM Switches 4 Port KVM Switches 8 Port KVM Switches 16 Port KVM Switches KVM over IP Switches Matrix KVM over IP Switches KVM Switches DVI KVM Switches DVI Matrix Switches KVM Extender KVM over IP Extender USB Extender VGA Extender VGA + Audio Extender VGA + Audio + RS232 Extender DVI Extender DVI KVM Extender HDMI Extender DVI Splitter VGA Splitter VGA Video Switches Digital Signage Audio over IP Desktop over IP Line Interaktive USV Anlagen	1p / 1p Online USV Anlagen 3p / 1p Online USV Anlagen 3p / 3p Online USV Anlagen USV Anlagen USV Batterien USV Elektro Verteilung USV Service & Support USV Software USV Anlagen für Rechenzentren ATS Automatic Transfer Switches Konverter CATx Patchkabel LWL Patchkabel Netzwerkschränke Serverschränke Remote I/O Kontakte über IP Remote Power Management Rack Monitoring / Serverraum Überwachung Wireless Communication Mobiles Ethernet / Netzwerk GSM / GPRS / EDGE / UMTS / HSDPA Device Server Secure Console Server Serielle Server USB over IP	Brandfrühsterkennung Brandmelder Brandschutzpaneele Brandschutztüren Brandmeldezentralen Doppelboden / Doppelböden E-Installationstechnik Gaslöschanlagen Hochverfügbarkeitsraum / Hochverfügbarkeitsräume Kabeldurchführungen Klimageräte Leckagenwarnsysteme Netzersatzanlagen Präzisionsklimaschränke Sauerstoffreduzierung Serversafes Sicherheitsfolien Switchbox Videoüberwachung Zutrittssysteme